

S38 Track Luminaire

PRODUCT DESCRIPTION

Ketra track lighting solution for integrating Ketra full spectrum S38 lamps into retrofit and new construction projects.

FEATURES


High Def Palette—covers a wide range of 16.7 million colors, including pastels, saturated colors and high CRI whites spanning from 1,400K to 10,000K.

Dynamic Spectrum—precisely tunes the amount of energy across the visible spectrum to produce Natural Light, Natural Dimming and Vibrancy.

TruBeam—produces uniform color across any available beam angle.

Color Lock—maintains your desired color point at a one-step MacAdam Ellipse across all Ketra product families and over each product's lifetime.

ACCESSORIES

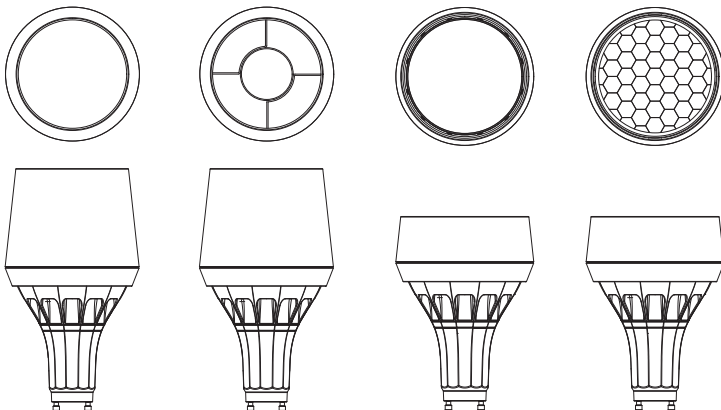


Tall Snoot
30 in (762 mm)
Cutoff

Tall Snoot with
15 in (381 mm)
Baffle

Short Snoot
55 in (1397 mm)
Cutoff

Short Snoot with
Hex Louver
45 in (1143 mm)
Cutoff


Finish



White



Black

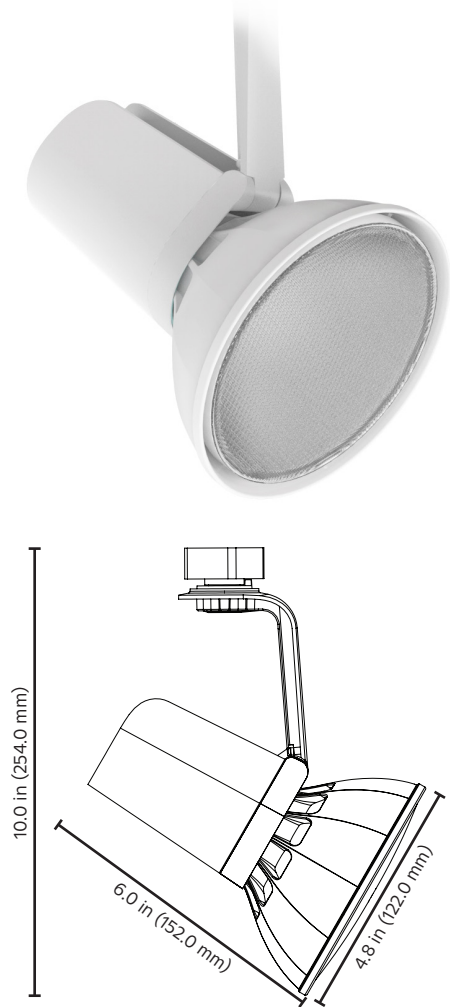

SPECIFICATIONS¹

Optical Performance

Delivered Lumens ²	1100 lm
CRI (Ra) ³	>90 (R9 >90)
Lumen Maintenance ⁴	36,000 hours to L70 @ 25 °C T _A
Color Point Maintenance	One-step MacAdam Ellipse over product lifetime
Equivalent Traditional Lamp	75 W/ 100 W halogen PAR38
Dimming Range ⁵	0.1-100%

Environmental

Ambient Temperature (T _A)	32 to 122 °F (0 to 50 °C)
Storage Temperature	-4 to 176 °F (-20 to 80 °C)
Humidity	0-95%, Non-condensing
Certification	UL, cUL, RoHS, FCC Class B
Location	UL Damp Location, IP20, not for use in outdoor applications

Mechanical

Fixture Weight	13.8 oz, 390 g
Housing Material	Powder Coated Aluminum, Polymer
Lens Material	Non-yellowing PMMA
Base Type	GU24

Electrical

Power Consumption	S38.11 HE – 12.3 W (1115 lm)
Power Factor	>0.9
Current	170 mA Max
Efficacy	S38.11 HE – 90.4 lm/W
Emergency Lighting	Evaluated by UL ⁶ for use in emergency lighting systems in accordance with standard UL ⁶ 924 and CSA C22.2 No. 141 when paired with the LVS TM model LUT-SHUNT-A-TD (UL ⁶ file E206507) ⁶ .

¹ All performance measurements taken at 3000K, 25 °C ambient, 100% power input, unless otherwise stated.

² Lumen measurement complies with IES LM-79-08 testing procedures.

³ See color gamut chart at the end of this document.

⁴ Lumen maintenance values calculated in accordance to TM-21 procedures based on LM-80 compliant measurement data.

⁵ Intensity and color point control requires compatible system.

⁶ See Lutron Application Note 106 (P/N 048106) at www.lutron.com for wiring details. This is only applicable to CCX fixtures used in an Athena system.

ORDERING GUIDE

Please download this PDF to use the interactive drop down features of the ordering guide.

	TA	S38	11		11	G24			
Product Line	Fixture Style	Model	Lumens	System/ Beam Angle	Region / Voltage	Base Type	Adapter Type	Housing Finish	Accessory

Order code: _____

Product Line	Code	System/Beam Angle	Code	Housing Finish	
Commercial (Athena compatible)	CM-	CCX Spot (10°) ¹	GTSP	White	WH
		CCX Flood (25°) ¹	GTFL	Black	BK
Residential (HomeWorks compatible)	HW-	CCX Wide Flood (40°) ¹	GTWFL	Accessory	
		CCX Very Wide Flood (60°) ¹	GTVFL	Short Snoot 55° cutoff	SNT55
Fixture Style		Region / Voltage		Tall Snoot 30° cutoff	SNT30
Track Luminaire	TA	North America, 120 V~ 60 Hz	11	Hex Louver 45° cutoff, includes SNT55	LUV45
Model		Base Type		Baffle 15° cutoff, includes SNT30	BFL15
S38	S38	GU24	G24	No Accessory	NA
Lumens		Adapter Type	Code		
1100	11	"H-Type" Compatible	H		
		½ in (12.7 mm) NPT Canopy Mount	N		


Accessories

S38 Accessory Snoot 30° cutoff, White	S38ASNT30WH
S38 Accessory Snoot 30° cutoff, Black	S38ASNT30BK
S38 Accessory Snoot 55° cutoff, White	S38ASNT55WH
S38 Accessory Snoot 55° cutoff, Black	S38ASNT55BK
S38 Accessory Louver 45° cutoff, White (Requires S38ASNT55)	S38ALUV45WH
S38 Accessory Louver 45° cutoff, Black (Requires S38ASNT55)	S38ALUV45BK
S38 Accessory Baffle 15° cutoff, White (Requires S38ASNT30)	S38ABFL15WH
S38 Accessory Baffle 15° cutoff, Black (Requires S38ASNT30)	S38ABFL15BK



¹ CCX stands for Clear Connect-Type X.

PRODUCT DIMENSIONS

H-Type Track Mount

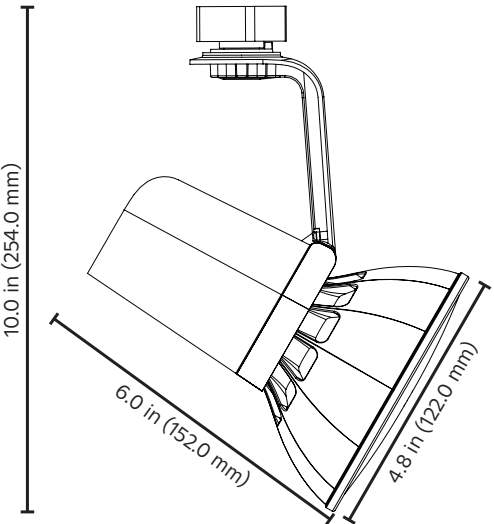

NPT Canopy Mount

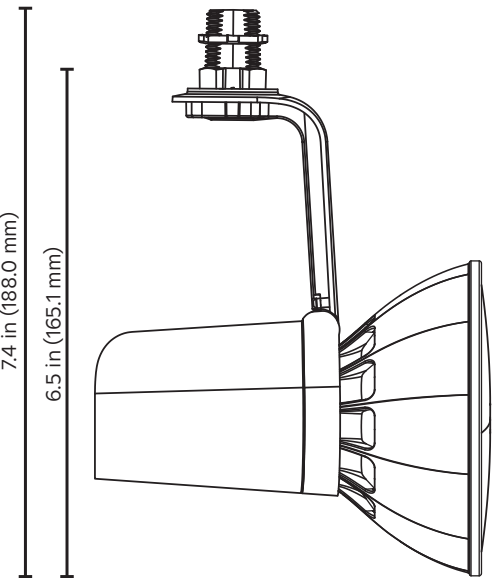
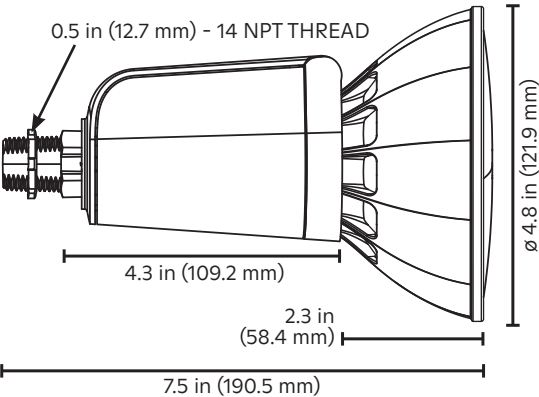


CAD files available upon request

PHOTOMETRIC DATA: 2700 - 5000 K VALUES ONLY



Beam Angle: 10° Spot (SP)

Product Code ¹	Wattage	Lumens	CBCP
S3811ICTSP11E26WH	12 W	1100	11,593

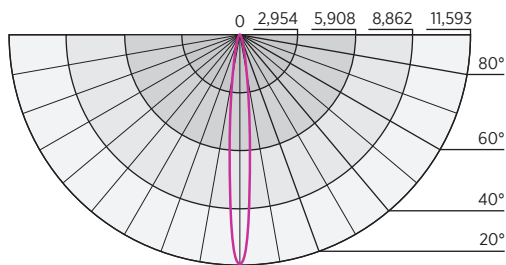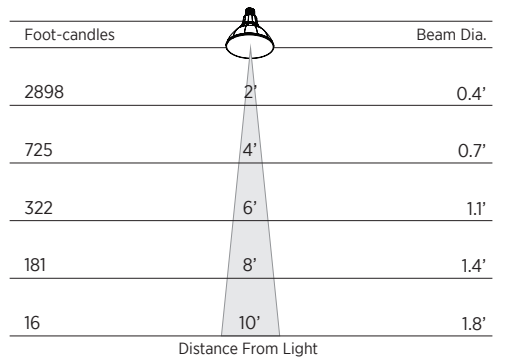



Beam Angle: 25° Flood (FL)

Product Code ¹	Wattage	Lumens	CBCP
S3811BTFL11E26WH	12 W	1100	4873

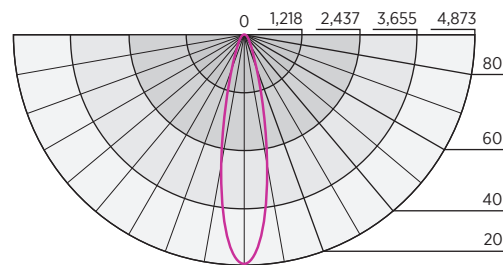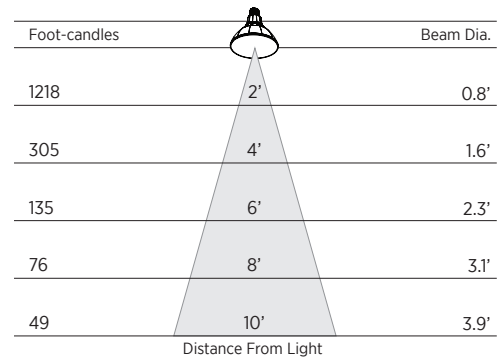



Beam Angle: 40° Wide Flood (WFL)

Product Code ¹	Wattage	Lumens	CBCP
S3811BTWFL11E26WH	12 W	1100	1217

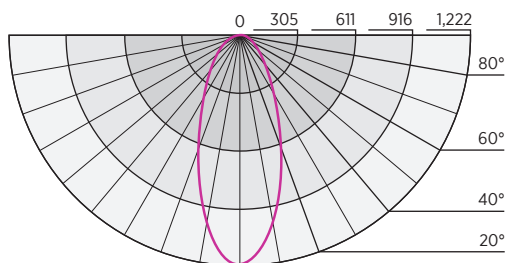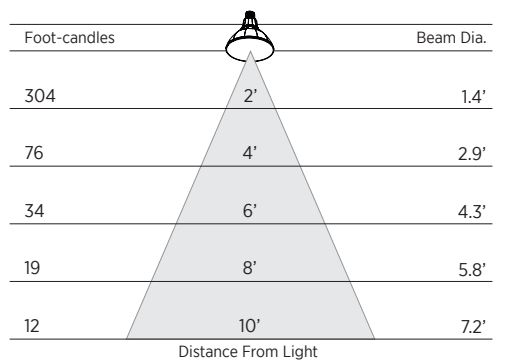

Beam Angle: 60° Very Wide Flood (VFL)


Product Code ¹	Wattage	Lumens	CBCP
S3811BTVFL11E26WH	12 W	1100	818

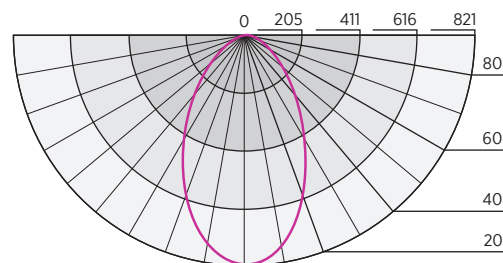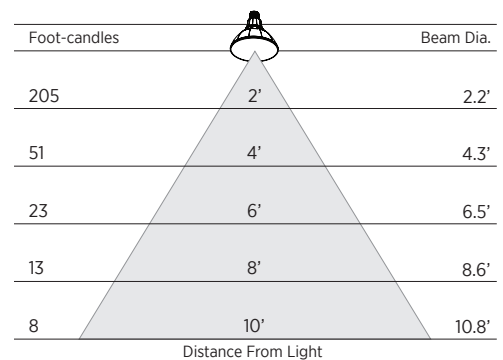

¹ This option is not available for sale in California.

WIDE GAMUT

CIE 1931 Color Chart

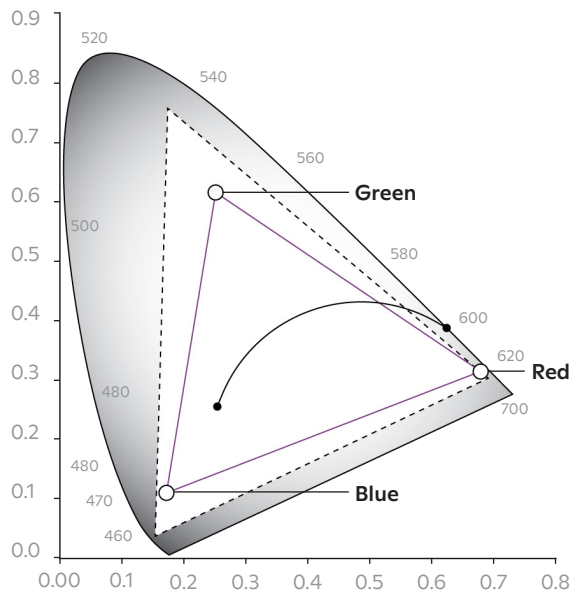

Ketra's LED Track Luminaire can easily be commissioned into Lutron HomeWorks or Athena systems. The product can reproduce any color point within the triangle shaped gamut indicated in the chart to the left. With Ketra's innovative optical and thermal feedback system, the color point is maintained to an accuracy of one-step MacAdam Ellipse over the lifetime of the product and across operating temperature range.

— **Color Lock**—Color point is maintained to an accuracy of one-step MacAdam Ellipse over the lifetime of the product and across operating temperature range.

----- **Expanded Gamut**—Color calibration is relaxed such that each product produces the most saturated color it is capable of.

S38 General Specifications

Color Point Maintenance: Employ closed loop optical and thermal feedback capable of maintaining color point accuracy at a one-step MacAdam ellipse over product lifetime¹.

Wireless Capability: LED light source shall have an integrated wireless control on board.

Color Rendering Index (CRI): Capable of CRI greater than 90 at any point along the Black Body Curve from 2,700K to 5,000K.

Single Source Multi-Dye Modular Emitter/LED Module

Design: Employ a single source multi-dye modular emitter/LED module consisting of both monochromatic and phosphor converted blue LED dye.

LED Estimated Useful Life: Minimum of 50,000 hours at 70 percent lumen maintenance, calculated based on IES LM-80 test data.

Warranty: Ketra's light source is warrantied to be free from material defects in material and workmanship for five (5) years or 25,000 hours from date of shipment, whichever is less.

Lighting System Capable of the Following Dimming Functionality:

1. Automatically mimicking natural daylight by shifting Correlated Color Temperature (CCT) and intensity based on time-of-day.
2. Shifting from high CCT at high intensity to low CCT at low intensity, mimicking dimming curve of an incandescent lamp.
3. Changing intensity while maintaining full color spectrum or CCT.
4. Changing full color spectrum or CCT while maintaining intensity.

Spectral Power Distribution Manipulation: Light system capable of manipulating the Spectral Power Distribution (SPD) by automatically adjusting distributions of color intensity while maintaining the same Correlated Color Temperature (CCT).

Dimming Range: Dimmable from 100 to 0.1 percent measured luminous flux.

Color Point Range: Single light source capable of producing 16.7 million colors and white from 1,400K to 10,000K Correlated Color Temperature (CCT).

¹ Color point maintenance not guaranteed while operating at ambient temperatures between -35 °C and 0 °C.