

L3I Linear Pendant

The Ketra Difference:

High Def Palette—covers a wide range of 16.7 million colors, including pastels, saturated colors and high CRI whites spanning from 1,400K to 10,000K.

Dynamic Spectrum—precisely tunes the amount of energy across the visible spectrum to produce Natural Light, Natural Dimming and Vibrancy.

TruBeam—produces uniform color across any available beam angle.

Color Lock—maintains your desired color point at a one-step MacAdam Ellipse across all Ketra product families and over each product’s lifetime.



ORDERING GUIDE

Please download this PDF to use the full functionality of the ordering guide.

CM-	L3I		BT	DL					
Product Line	Model	Lumens/ft	Platform / Control	Lens Option	Region / Voltage	Mounting	Fixture Color	Configuration	Length

Order code: _____

Product Line	Code	Region / Voltage	Code	Configuration	Code
Commercial (Athena compatible)	CM-	North America, 120 V~ 60 Hz	11	Power Input Only	PR1
		North America, 277 V~ 60 Hz	12	Power Input and Output	PR2
Model	L3I	Mounting (see page 3 mounting details)			
		Hard Ceiling	C1	Segment Start Power Input	SS1
Linear 3 in (76.2 mm) aWide Indirect Pendant	L3I	T-Bar	C2	Segment End Power Output	SE2
				Segment End	SEN
Lumens/ft		Fixture Color			
		White	WWW	Segment Middle Power Input	SM1
400	04	Black	BBB	Segment Middle	SMN
600	06	White Fixt, White Cable, Black Can	WWB	Length	
800	08	White Fixt, Black Cable, Black Can	WBB	Continuous length, available in 1 ft increments >6 ft	--
1000	10	Black Fixt, Black Cable, White Can	BBW	3 ft (0.914 m)	0003
System	BT	Black Fixt, White Cable, White Can	BWW	4 ft (1.219 m)	0004
				6 ft (1.828 m)	0006
KetraNet/CCX ¹	BT			8 ft (2.438 m)	0008
				10 ft (3.048 m)	0010
Lens Options	DL			12 ft (3.657 m)	0012

¹ CCX stands for Clear Connect-Type X.



L3I LINEAR PENDANT

P/N 3662376 Rev C

Specifications are subject to change without notice

SPECIFICATIONS¹

Optical & Electrical Performance

Delivered Lumen Output ²	L3I.04	400 lm/ft
	L3I.06	600 lm/ft
	L3I.08	800 lm/ft
	L3I.10	1000 lm/ft
CRI (Ra) ³	>90 (R9 >90)	
Lumen Maintenance ³	50,000 hours to L70 @ 25°C Ambient	
Color Spatial Uniformity	One-step MacAdam Ellipse over product lifetime	
Color Point Range	1400 - 10000 K, Pastel and Saturate colors	
Dimming Range	0.1-100%	
Power Consumption	L3I.04	7.7 W/ft
	L3I.06	10 W/ft
	L3I.08	12.4 W/ft
	L3I.10	15.5 W/ft
Voltage	120 V~ 60 Hz, 277 V~ 60 Hz	
Power Factor	>0.9	
Current	82 mA Max	
Delivered Efficacy	L3I.04	51.9 lm/W
	L3I.06	60 lm/W
	L3I.08	64.5 lm/W
	L3I.10	64.5 lm/W
Surge Protection	2.5 KV	
Max. qty of fixture length per N3 power feed	40 ft (12.19 m)	
Max total run length, including cable, per N3	100 ft (30.48 m)	
Emergency Lighting	<p>Evaluated by UL[®] for use in emergency lighting systems in accordance with standard UL[®] 924 and CSA C22.2 No. 141 when paired with the LVS™ model LUT-SHUNT-A-TD (UL[®] file E206507) and Ketra N3 Satellite. See Lutron Application Note 106 (P/N 048106) at www.lutron.com for wiring details. This is only applicable to CCX fixtures used in an Athena system.</p>	

Environmental

Operating Temperature	0 to 50 °C
Storage Temperature	-20 - 80 °C
Humidity	0 - 95%, Non-condensing
Certification	UL, cUL, RoHS, FCC Class B
Location	UL Damp Location, IP20


Mechanical

Weight	2.5 lbs/ft, 1.13 kg/ft
Housing Material	Powder Coated Aluminum, Corrosion Protected Steel
Lens Material	UL F1 outdoor rating for UV and water contact PMMA

Dimensions

Length	See Length Charts on page 3
Width	3 in (76.2 mm)
Height	3 in (76.2 mm) 4.5 in (114.3 mm) with mounting points
Default Aircraft Cable Length	36 in (91.44 cm)
Default Canopy Size	5 in (12.7 cm)

WIRING DIAGRAM

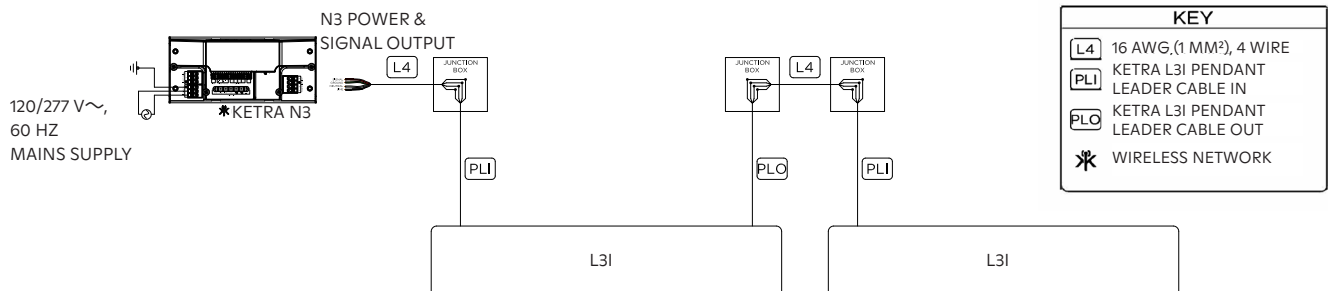

PER N3:
 MAX. FIXTURE QTY: 40 FT (12.19 M) OF L3I
 MAX. RUN LENGTH: 100 FT (30.48 M)


¹ All performance measurements taken at 3000 K, 25 °C ambient, 100% power input, unless otherwise stated, within CCT range of 2700 - 5000 K.

² Lumen measurement complies with IES LM-79-08 testing procedures.

³ Lumen maintenance values calculated in accordance to TM-21 procedures based on LM-80 compliant measurement data.


PRODUCT DIMENSIONS

Standalone

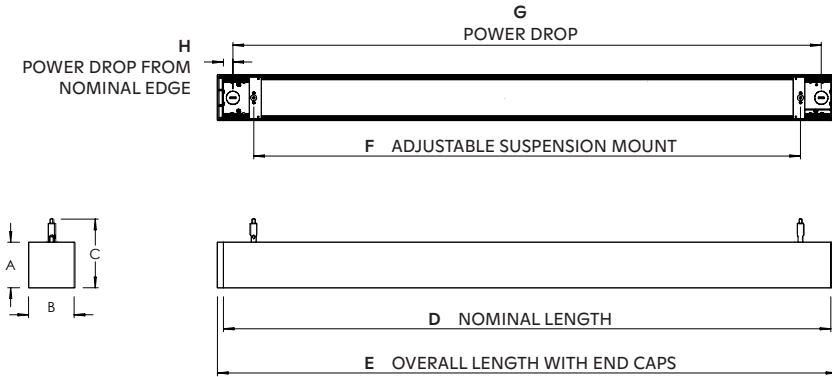

Fixture Length	A		B		C		D		E		F				G				H			
	IN	MM	IN	MM	IN	MM	IN	MM	IN	MM	Max		Min		Max		Min		Max		Min	
3	3	76.2	3.0	76.2	4.5	114.3	40	1016	40.8	1036	40	1016	20	508	37.5	953	38.75	984	1.25	31.9	0.625	15.9
4							52	1321	52.8	1341	52	1321	26	660	52	1321	52	1321				
6							76	1930	76.8	1950	76	1930	38	965	76	1930	76	1930				
8							96	2438	96.8	2458	96	2438	48	1219	96	2438	96	2438				
10							120	3048	120.8	3068	120	3048	60	1524	120	3048	120	3048				
12							144	3658	144.8	3678	144	3658	72	1829	144	3658	144	3658				

Continuous Runs

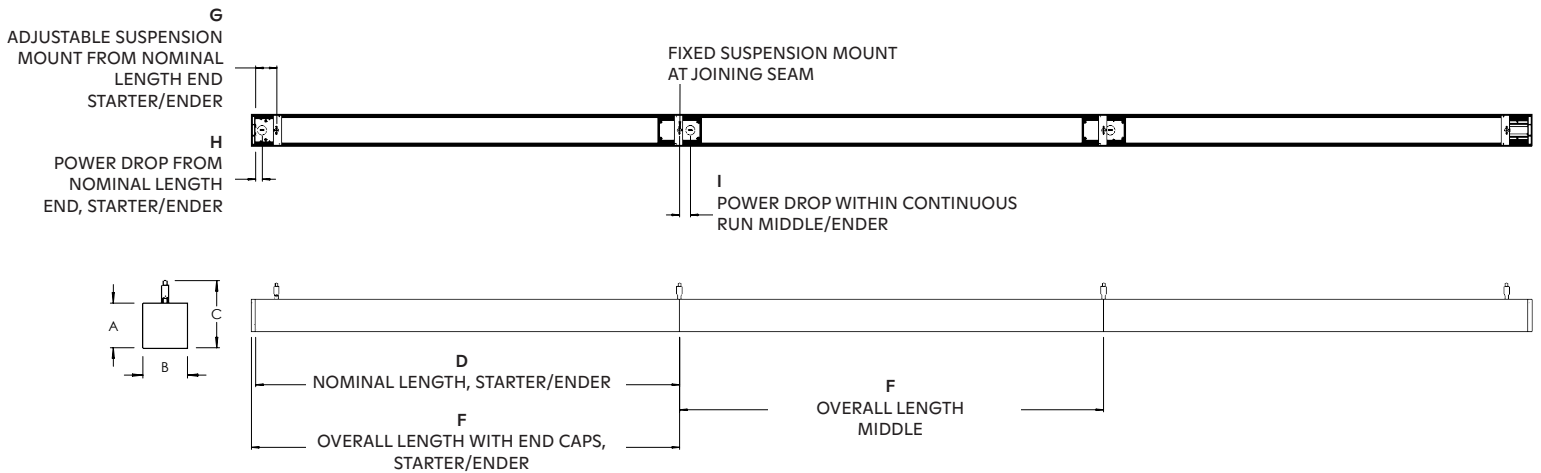

Fixture Length	A		B		C		D		E		F		G				H				I	
	IN	MM	IN	MM	IN	MM	IN	MM	IN	MM	IN	MM	Max		Min		Max		Min		IN	MM
3	3	76.2	3.0	76.2	4.5	114.3	40	1016	40.4	1026	40	1016	10	1016	0	0	1.25	31.9	0.625	15.9	1	26
4							52	1321	52.4	1331	52	1321	13	1321	0	0						
6							76	1930	76.4	1940	76	1930	19	1930	0	0						
8							96	2438	96.4	2448	96	2438	24	2438	0	0						
10							120	3048	120.4	3058	120	3048	30	3048	0	0						
12							144	3658	144.4	3668	144	3658	36	3658	0	0						



OPTIONAL HARDWARE ORDERING GUIDE

Replacement Canopy¹

UN-	PC		
Product Line	Part	Canopy Type	Color

Order code: _____

Product Line	Code
--------------	------

Universal	UN-
-----------	------------

Part	
------	--

Pendant Canopy	PC
----------------	-----------

Canopy Type	
-------------	--

5 in (12.7 cm) Power Feed (Ships Default)	5P
---	-----------

5 in (12.7 cm) non-powered point (Ships Default)	5N
--	-----------

2 in (5.08 cm) (non-powered point)	2N
------------------------------------	-----------

Color	
-------	--

White	WHT
-------	------------

Black	BLK
-------	------------

Replacement Mounting Hardware²

UN-	PM			
Product Line	Part	Mounting Type	Point Type	AC Length

Order code: _____

Product Line	Code
--------------	------

Universal	UN-
-----------	------------

Part	
------	--

Pendant Mounting	PM
------------------	-----------

Mounting Type	
---------------	--

Hard Ceiling	C1
--------------	-----------

T-Bar	C2
-------	-----------

Point Type	
------------	--

Powered Point	PWR
---------------	------------

Non-Powered Point	NPR
-------------------	------------


Aircraft Cable Length	
-----------------------	--

36 in (91.44cm) (Ships Default)	036
---------------------------------	------------

72 in (182.88cm)	072
------------------	------------

¹ 5 in (12.7 cm) Canopy ships default with pendant, Replacement order code allows for replacement canopies, or 2 in (5.08 cm) non-standard canopies for non-powered points

² 36 in (91.44 cm) Aircraft Cable ships default with pendant.

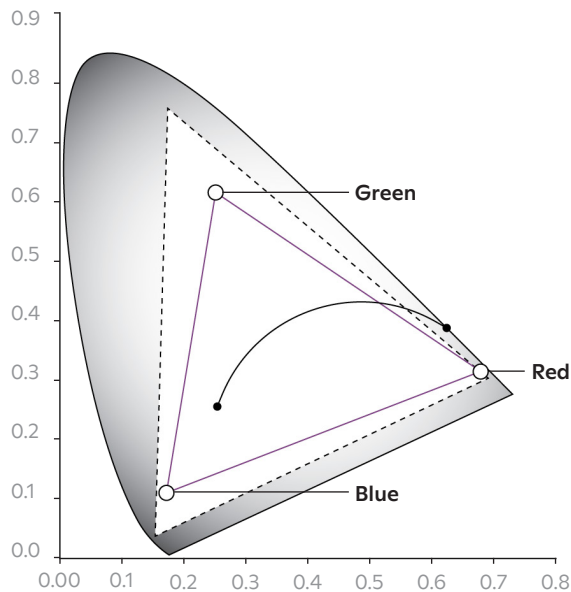WIDE GAMUT
CIE 1931 Color Chart


Ketra's L3I Linear Pendant can easily be commissioned into Lutron HomeWorks or Athena systems. The product can reproduce any color point within the triangle shaped gamut indicated in the chart to the left. With Ketra's Color Lock tool, the color point is maintained to an accuracy of one-step MacAdam Ellipse over the lifetime of the product and across operating temperature range.

- **Color Lock**—Color point is maintained to an accuracy of one-step MacAdam Ellipse over the lifetime of the product and across operating temperature range.
- - - **Expanded Gamut**—Color calibration is relaxed such that each product produces the most saturated color it is capable of.

General Specifications

Color Point Maintenance: Employ closed loop optical and thermal feedback capable of maintaining color point accuracy at a one-step MacAdam ellipse over product lifetime.

Wireless Capability: LED light source shall have an integrated wireless control on board.

Color Rendering Index (CRI): Capable of CRI greater than 90 at any point along the Black Body Curve from 2,700K to 5,000K.

Single Source Multi-Dye Emitter Design: Employ a single source multi-dye emitter consisting of both monochromatic and phosphor converted blue LED dye.

LED Estimated Useful Life: Minimum of 50,000 hours at 70 percent lumen maintenance, calculated based on IES LM-80 test data.

Warranty: Ketra's light source is warranted to be free from material defects in material and workmanship for five (5) years or 25,000 hours from date of shipment, whichever is less.

Lighting System Capable of the Following Dimming Functionality:

1. Automatically mimicking natural daylight by shifting Correlated Color Temperature (CCT) and intensity based on time-of-day.
2. Shifting from high CCT at high intensity to low CCT at low intensity, mimicking dimming curve of an incandescent lamp.
3. Changing intensity while maintaining full color spectrum or CCT.
4. Changing full color spectrum or CCT while maintaining intensity.

Spectral Power Distribution Manipulation: Light system capable of manipulating the Spectral Power Distribution (SPD) by automatically adjusting distributions of color intensity while maintaining the same Correlated Color Temperature (CCT).

Dimming Range: Dimmable from 100 to 0.1 percent measured luminous flux.

Color Point Range: Single light source capable of producing 16.7 million colors and white from 1,400K to 10,000K Correlated Color Temperature (CCT).

The Ketra logo, Ketra, and KetraNet are trademarks or registered trademarks of Lutron Ketra, LLC, in the US and/or other countries. Clear Connect and Athena are trademarks or registered trademarks of Lutron Electronics Co., Inc. in the US and/or other countries. All other product names, logos, and brands are property of their respective owners.