

S30 Lamp

PRODUCT DESCRIPTION

Ketra all-encompassing full-spectrum PAR 30 LED retrofit solution with various beam angles.

FEATURES


High Def Palette—covers a wide range of 16.7 million colors, including pastels, saturated colors and high CRI whites spanning from 1400K to 10,000K.

Dynamic Spectrum—precisely tunes the amount of energy across the visible spectrum to produce Natural Light, Natural Dimming and Vibrancy.

TruBeam—produces uniform color across any available beam angle.

Color Lock—maintains your desired color point at a one-step MacAdam Ellipse across all Ketra product families and over each product's lifetime.


Finish




White



Black

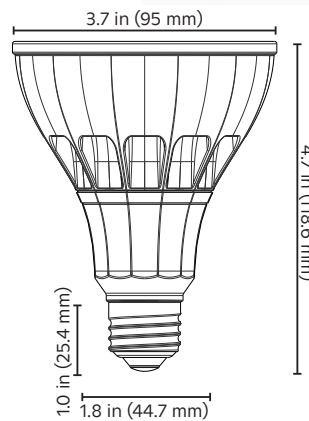

E26 Base

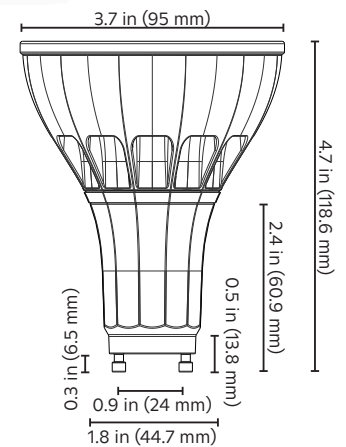

GU24 Base

SPECIFICATIONS¹

Optical & Electrical Performance

Delivered Lumens ²	1100 lm
CRI (Ra) ³	>90 (R9 >90)
Lumen Maintenance ³	50,000 hours to L70 @ 25 °C TA
Color Point Maintenance ⁴	One-step MacAdam Ellipse over product lifetime
Color Point Range ⁴	1400K – 10,000K, Fully Saturated, & Pastel
Equivalent Traditional LED S30 Lamp	75 W halogen PAR30
Dimming Protocol	Wireless RF / CCX (Lutron Clear Connect-Type X)
Dimming Range ⁴	0.1-100%

Environmental

Ambient Temperature	32 to 122 °F (0 to 50 °C)
Extended Ambient Temperature ⁵	-13 to 32 °F (-25 to 0 °C)
Humidity	0 - 95%, Non-condensing
Certification	UL, cUL, RoHS, FCC Class B
Location	UL Damp Location, IP20
Outdoor / Indoor ⁵	Outdoor use available for residential enclosed/covered patio applications only
Warranty	5 year fixture, LED, and dimming warranty

Mechanical

Weight	1.35 lbs (600 g)
Housing Material	Powder Coated Aluminum, Polymer
Lens Material	UL Damp Location, IP20
Base Type	E26 GU24

Electrical

Power Consumption	S30.10 – 14.5 W (1134 lm) S30.10 HE – 12 W (1107 lm)
Power Factor	>0.9
Efficacy	S30.10 – 78.3 lm/W S30.10 HE – 92.2 lm/W
Current	170 mA Max
Emergency Lighting	Evaluated by UL ⁶ for use in emergency lighting systems in accordance with standard UL ⁶ 924 and CSA C22.2 No. 141 when paired with the LVS TM model LUT-SHUNT-A-TD (UL ⁶ file E206507) ⁶ .

¹ All performance measurements taken at 3,000K, 25 °C ambient, 100% power input, unless otherwise stated.

² Lumen measurement complies with IES LM-79-08 testing procedures.

³ Lumen maintenance values calculated in accordance to TM-21 procedures based on LM-80 compliant measurement data.

⁴ Intensity and color point control requires compatible system.

⁵ Color accuracy not guaranteed in Extended Ambient Temperature range in outdoor applications.

⁶ See Lutron Application Note 106 (P/N 048106) at www.lutron.com for wiring details. This is only applicable to CCX fixtures used in an Athena system.

ORDERING GUIDE

Please download this PDF to use the interactive drop down features of the ordering guide.

	S30			GT		11		
Product Line	Model	Lumens	Location	System	Beam Angle	Region/Voltage	Base	Housing Finish

Order code: _____

Product Line	Code	Location	Code	Region/Voltage	Code
Commercial (Athena and myRoom XC compatible)	CM-	Indoor	I	North America, 120 V~ 60 Hz	11
		Outdoor (HomeWorks resi products only) ⁴	O		
Residential (HomeWorks compatible)	HW-	System		Base	
		CCX ⁵	GT	E26	E26
				GU24	G24
Model		Beam Angle		Housing Finish	
S-Series PAR30 Long Neck LED S30 Lamp	S30	Spot (15°)	SP	White	WH
		Flood (25°)	FL	Black	BK
Lumens					
1100 ¹	10	Wide Flood (40°)	WFL		
1100 High-Efficacy ^{2,3,4}	10H	CCX Very Wide Flood (60°)	VFL		
		CCX Extra Wide Flood (90° BR Style) ⁶	XFL		

¹ This option is not available for sale in California.

² High-efficacy light sources are Title 20 and Title 24 JA8 complaint.

³ High-efficacy only available for design with Clear Connect-Type X systems.

⁴ For residential enclosed/covered patio outdoor applications only. More details are available in the Environmental section of the Specifications page.

⁵ CCX stands for Clear Connect-Type X.

⁶ Extra Wide Flood beam angle is not available in the high-efficacy lumen options.

ACCESSORIES ORDERING GUIDE

Please download this PDF to use the interactive drop down features of the ordering guide.

UN-	S30A		
Product Line	Model	Accessory Type	Housing Color

Order code: _____

Product Line	Code
Universal	UN-
Model	
S30 Accessory	S30A
Accessory Type	
Short Snoot	SNT55
Tall Snoot	SNT30
45° Hex Louver Includes Short Snoot	LUV45
15° Baffle Includes Tall Snoot	BFL15
Housing Color	
White (Snoots only)	WH
Black	BK

55° Cutoff Short Snoot



45° Cutoff Hex Louver with
55° Cutoff Short Snoot



30° Cutoff Tall Snoot




15° Cutoff Baffle with 30°
Cutoff Tall Snoot




PRODUCT DIMENSIONS

E26 BASE

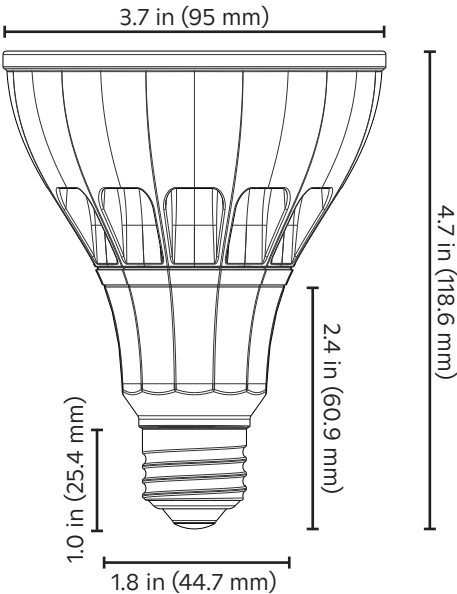

GU24 BASE

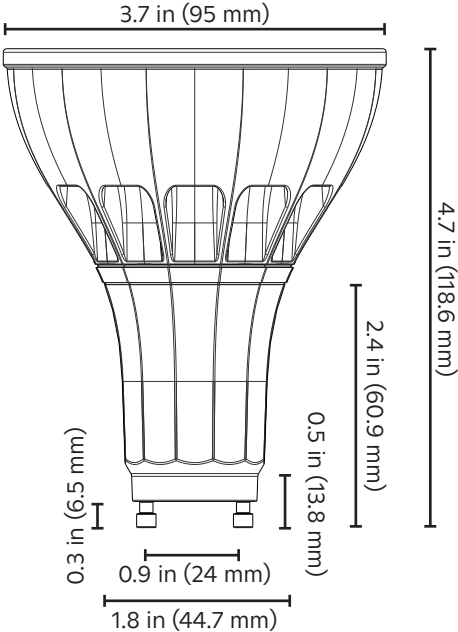


CAD files available upon request

PHOTOMETRIC DATA: 2700 - 5000K VALUES ONLY


Beam Angle: 15° Spot (SP)

Model Number ¹	Wattage	Delivered Lumens	CBCP
S3010ICTSP11E26WH	14 W	1100	7501

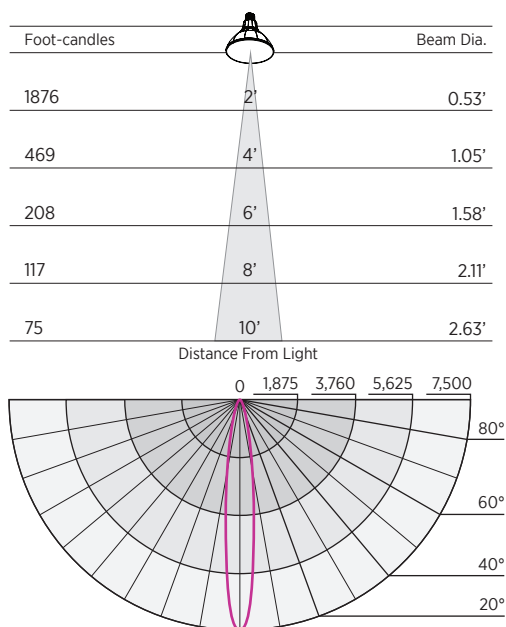


Beam Angle: 25° Flood (FL)

Model Number ¹	Wattage	Delivered Lumens	CBCP
S3010IBTFL11E26WH	14 W	1100	3672

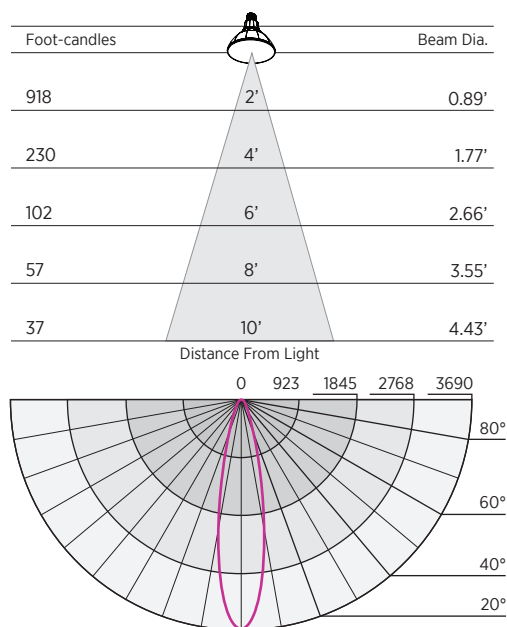

Beam Angle: 40° Wide Flood (WFL)

Model Number ¹	Wattage	Delivered Lumens	CBCP
S3010IBTWFL11E26WH	14 W	1100	1542

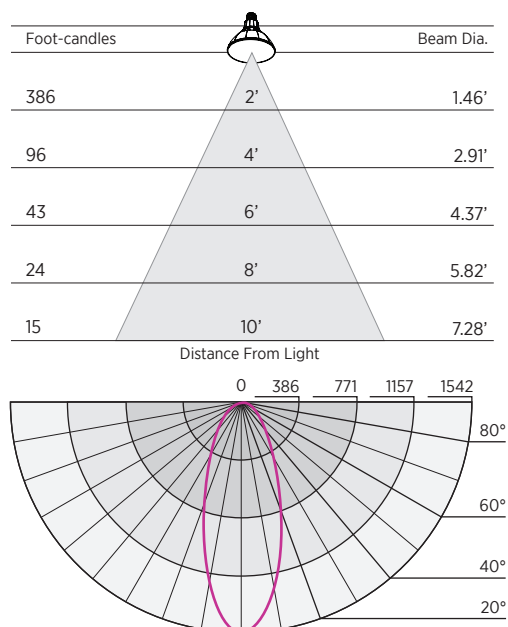


¹ Performance data applies to all base types and housing colors.

PHOTOMETRIC DATA: 2700 - 5000K VALUES ONLY


Beam Angle: 60° Very Wide Flood (VFL)

Model Number ¹	Wattage	Delivered Lumens	CBCP
S3010IBTVFL11E26WH	14 W	1100	897

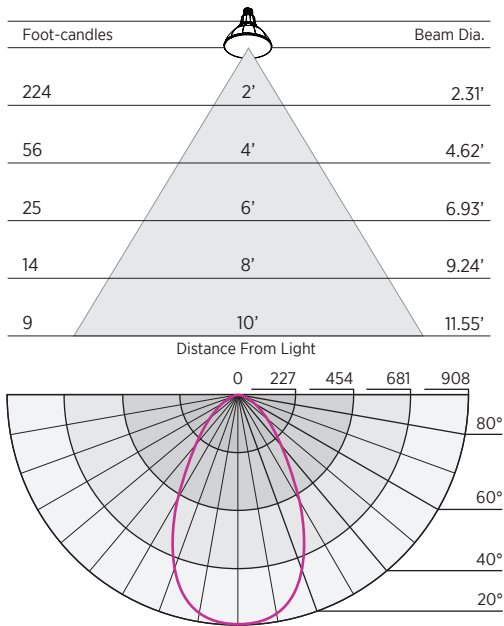

Beam Angle: 90° Extra Wide Flood (XFL)


Model Number ¹	Wattage	Delivered Lumens	CBCP
S3010IBTXFL11E26WH	14 W	1100	503

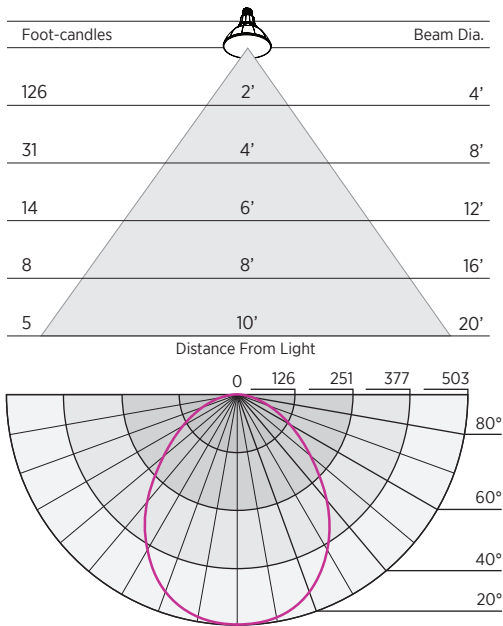

¹ Performance data applies to all base types and housing colors.

WIDE GAMUT

CIE 1931 Color Chart

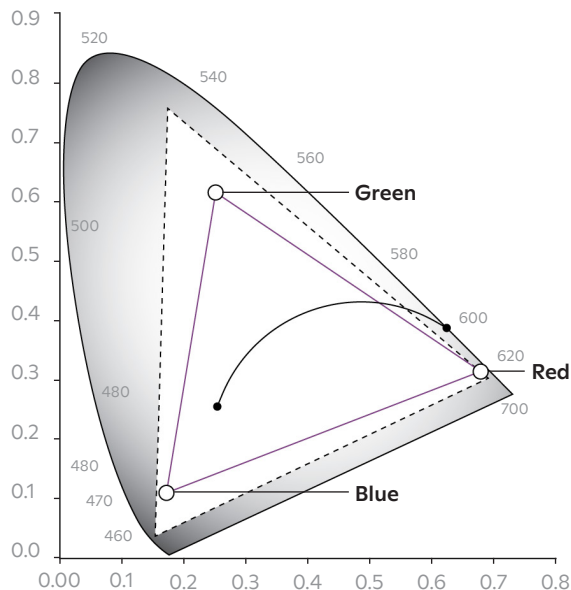

Ketra's S30 Tunable LED S30 Lamp can easily be commissioned into Lutron HomeWorks, Athena, or myRoom XC systems. The product can reproduce any color point within the triangle shaped gamut indicated in the chart to the left. With Ketra's innovative optical and thermal feedback system, the color point is maintained to an accuracy of one-step MacAdam Ellipse over the lifetime of the product and across operating temperature range.

- **Color Lock**—Color point is maintained to an accuracy of one-step MacAdam Ellipse over the lifetime of the product and across operating temperature range.
- **Expanded Gamut**—Color lock not guaranteed such that each product produces the most saturated color of which it is capable.

S30 General Specifications

Color Point Maintenance¹: Employ closed loop optical and thermal feedback capable of maintaining color point accuracy at a one-step MacAdam ellipse over product lifetime.

Wireless Capability: LED light source shall have an integrated wireless control on board.

Color Rendering Index (CRI): Capable of CRI greater than 90 at any point along the Black Body Curve from 2700K to 5000K.

Single Source Multi-Die Modular Emitter/LED Module Design: Employ a single source multi-die modular emitter/LED module consisting of both monochromatic and phosphor converted blue LED die.

LED Estimated Useful Life: Minimum of 50,000 hours at 70 percent lumen maintenance, calculated based on IES LM-80 test data.

Diagnostic Reporting Capability²: Clear Connect-Type X (CCX) light sources provide diagnostics and built-in technology to check input voltage and wireless connectivity.

Warranty: Ketra's light source is warrantied to be free from material defects in material and workmanship for five (5) years or 25,000 hours from date of shipment, whichever is less.

Lighting System Capable of the Following Dimming Functionality:

1. Automatically mimicking natural daylight by shifting Correlated Color Temperature (CCT) and intensity based on time-of-day.
2. Shifting from high CCT at high intensity to low CCT at low intensity, mimicking dimming curve of an incandescent lamp.
3. Changing intensity while maintaining full color spectrum or CCT.
4. Changing full color spectrum or CCT while maintaining intensity.

Spectral Power Distribution Manipulation: Light system capable of manipulating the Spectral Power Distribution (SPD) by automatically adjusting distributions of color intensity while maintaining the same Correlated Color Temperature (CCT).

Dimming Range: Dimmable from 100 to 0.1 percent measured luminous flux.

Color Point Range: Single light source capable of producing 16.7 million colors and white from 1400K to 10,000K Correlated Color Temperature (CCT).

¹ Color point maintenance not guaranteed in the expanded gamut or while operating at ambient temperatures between -13 to 32 °F (-25 to 0 °C).

² For diagnostics support or more information, please contact Lighting Technical Support at lightingsupport@lutron.com or 1.844.LUTRON1 (1.844.588.7661).